

# LIGHT VEHICLE BATTERY SOLUTIONS





# LIGHT VEHICLE BATTERY RANGE



**START-STOP**  **CONVENTIONAL**

## VEHICLE REQUIREMENTS

<b>START-STOP POWERTRAIN</b>	 Recommended OE Replacement	 Recommended OE Replacement	✗	✗
<b>NON START-STOP POWERTRAIN</b>	✗ Unless specified by vehicle manufacturer	<b>Extra life</b> for conventional vehicles	<b>Carbon Boost®</b> Faster recharge for high equipment level	<b>Widest Range</b> to fit almost 100% of car parc
<b>REGENERATIVE BRAKING</b>	■■■■■	■■■■■	✗	✗
<b>INTENSIVE URBAN USE</b>	■■■■■	■■■■■	■■■■■	■■■■■
<b>POWER HUNGRY EQUIPMENT</b>	■■■■■	■■■■■	■■■■■	■■■■■

## BATTERY PERFORMANCE


<b>CCA COLD CRANKING AMPERES</b>	■■■■■	■■■■■	■■■■■	■■■■■
<b>CHARGE ACCEPTANCE*</b>	■■■■■	■■■■■	■■■■■	■■■■■
<b>CYCLE LIFE</b>	■■■■■	■■■■■	■■■■■	■■■■■
<b>EXTRA ENERGY**</b>	■■■■■	■■■■■	■■■■■	■■■■■

\* Charge Acceptance (in A/Ah)

\*\* Energy throughput during Lifetime



# MORE THAN A MANUFACTURER EXIDE RECYCLES!

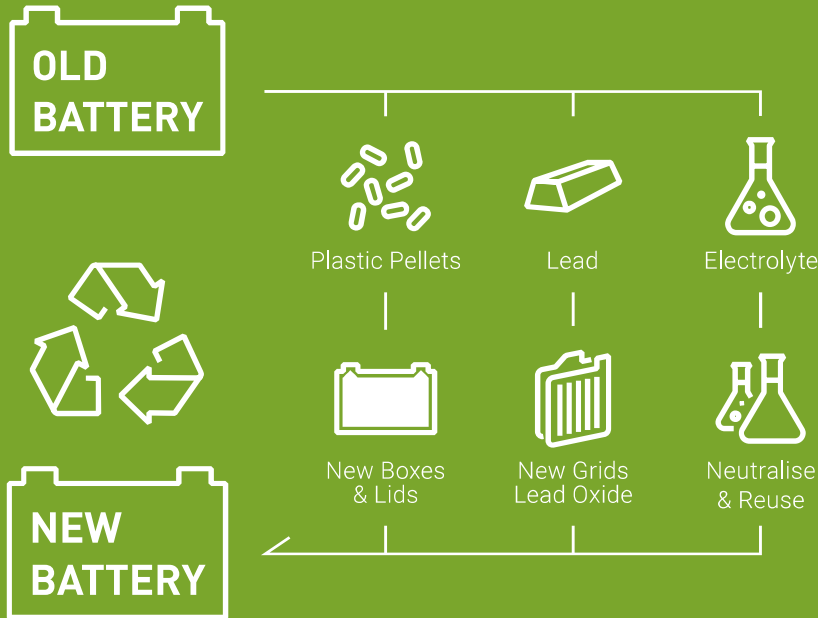

# 99%

OF ALL AUTOMOTIVE  
LEAD-ACID BATTERIES  
ARE RECYCLED IN EUROPE\*

# 100%

OF A LEAD-ACID BATTERY  
CAN BE RECYCLED

# 3 EXIDE RECYCLING FACILITIES IN EUROPE

## TYPE LIST

**START-STOP**  
CONVENTIONAL



**AGM**

Deta	Performances		Dimensions				Technical Characteristics			
	Code	Capacity Ah	CCA A (EN)	Container	L (mm)	W (mm)	H (mm)	Hold down	Polarity	Terminals
	DK508	50	800	G34	260	173	206	B7	ETN 9	1
	DK600	60	680	L02	242	175	190	B13	ETN 0	1
	DK700	70	760	L03	278	175	190	B13	ETN 0	1
	DK800	80	800	L04	315	175	190	B13	ETN 0	1
	DK950	95	850	L05	353	175	190	B13	ETN 0	1
	DK1050	105	950	L06	392	175	190	B13	ETN 0	1



**EFB**

	DL550	55	480	L01	207	175	190	B13	ETN 0	1
	DL600	60	640	L02	242	175	190	B13	ETN 0	1
	DL604	60	520	D23	230	173	222	B0	ETN 0	1
	DL605	60	520	D23	230	173	222	B0	ETN 1	1
	DL652	65	650	LB3	278	175	175	B13	ETN 0	1
	DL700	70	720	L03	278	175	190	B13	ETN 0	1
	DL752	75	730	LB4	315	175	175	B13	ETN 0	1
	DL754	75	750	D26	270	173	222	B0	ETN 0	1
	DL800	80	720	L04	315	175	190	B13	ETN 0	1
	DL954	95	800	D31	306	173	222	Korean B1	ETN 0	1
	DL955	95	800	D31	306	173	222	Korean B1	ETN 1	1
	DL1000	100	900	L05	353	175	190	B13	ETN 0	1
	DL1050	105	950	L06	392	175	190	B13	ETN 0	1



**AUXILIARY**

	DK091	9	120	C54	150	90	105	B0	ETN 1	M12
	DK111	11	150	C55	150	90	130	B0	ETN 1	M04
	DK131	13	200	C56	150	90	145	B0	ETN 1	M04
	DK143	14	80	C76	150	100	100	B0	ETN 3	Screwed/Lug
	DK151	15	200	C56	150	90	145	B0	ETN 1	Small taper post



**SENATOR3**

Detta	Performances		Dimensions				Technical Characteristics		
Code	Capacity Ah	CCA A (EN)	Container	L (mm)	W (mm)	H (mm)	Hold down	Polarity	Terminals
DA406	40	350	B19	187	136	220	B1	ETN 0	JIS taper post + Adapter
DA456	45	390	B24	237	136	227	B1	ETN 0	3+Adapter
DA472	47	450	LB1	207	175	175	B13	ETN 0	1
DA530	53	540	L01	207	175	190	B13	ETN 0	1
DA612	61	600	LB2	242	175	175	B13	ETN 0	1
DA640	64	640	L02	242	175	190	B13	ETN 0	1
DA654	65	580	D23	230	173	222	Korean B1	ETN 0	1
DA722	72	720	LB3	278	175	175	B13	ETN 0	1
DA754	75	630	D26	270	173	222	Korean B1+B6	ETN 0	1
DA755	75	630	D26	270	173	222	Korean B1+B6	ETN 1	1
DA770	77	760	L03	278	175	190	B13	ETN 0	1
DA852	85	800	LB4	315	175	175	B13	ETN 0	1
DA900	90	720	L04	315	175	190	B13	ETN 0	1
DA954	95	800	D31	306	173	222	Korean B1	ETN 0	1
DA955	95	800	D31	306	173	222	Korean B1	ETN 1	1
DA1000	100	900	L05	353	175	190	B13	ETN 0	1
DA1050	105	850	LH4	315	175	205	B13	ETN 0	1



**POWER**

DB320	32	270	E01	178	135	225	B1	ETN 0	1
DB356	35	240	B19	187	127	220	B0	ETN 0	3
DB356A	35	240	B19	187	136	220	Korean B1 Long	ETN 0	3
DB357	35	240	B19	187	127	220	B0	ETN 1	3
DB440	44	400	L00	175	175	190	B13	ETN 0	1
DB442	44	420	LB1	207	175	175	B13	ETN 0	1
DB450	45	330	E02	220	135	225	B1	ETN 0	1
DB451	45	330	E02	220	135	225	B1	ETN 1	1
DB454	45	330	B24	237	127	227	B0	ETN 0	1
DB455	45	330	B24	237	127	227	B0	ETN 1	1
DB456	45	330	B24	237	127	227	B0	ETN 0	3
DB457	45	330	B24	237	127	227	B0	ETN 1	3
DB500	50	450	L01	207	175	190	B13	ETN 0	1
DB501	50	450	L01	207	175	190	B13	ETN 1	1
DB504	50	360	D20	200	173	222	Korean B1	ETN 0	1
DB505	50	360	D20	200	173	222	Korean B1	ETN 1	1
DB558	55	620	575	230	180	186	B7	ETN 1	SAE S side Terminal 3/8"
DB602	60	540	LB2	242	175	175	B13	ETN 0	1
DB604	60	480	D23	230	173	222	Korean B1	ETN 0	1
DB605	60	480	D23	230	173	222	Korean B1	ETN 1	1
DB620	62	540	L02	242	175	190	B13	ETN 0	1
DB621	62	540	L02	242	175	190	B13	ETN 1	1
DB704	70	540	D26	270	173	222	Korean B1+B6	ETN 0	1
DB705	70	540	D26	270	173	222	Korean B1+B6	ETN 1	1
DB708	70	740	G78	260	180	186	B7	ETN 1	SAE S side Terminal 3/8"
DB712	71	670	LB3	278	175	175	B13	ETN 0	1
DB740	74	680	L03	278	175	190	B13	ETN 0	1
DB741	74	680	L03	278	175	190	B13	ETN 1	1
DB800	80	640	L04	315	175	190	B13	ETN 0	1
DB802	80	700	LB4	315	175	175	B13	ETN 0	1
DB852	85	760	LB5	353	175	175	B13	ETN 0	1
DB858	85	800	G65	306	192	192	B1	ETN 1	EN taper post
DB950	95	800	L05	353	175	190	B13	ETN 0	1
DB954	95	760	D31	306	173	222	Korean B1	ETN 0	1
DB955	95	760	D31	306	173	222	Korean B1	ETN 1	1
DB1000	100	720	LH4	315	175	205	B13	ETN 0	1
DB1100	110	850	L06	392	175	190	B13	ETN 0	1