


Light Traction Bloc Batteries

G06-12-105

(12V 105Ah @ 5hr)

Eternity Technologies valve regulated lead-acid batteries for the light traction market. With an innovative Gel-technology and maintenance free design, Eternity Technology Gel Bloc batteries are compatible with all universal cyclic applications.

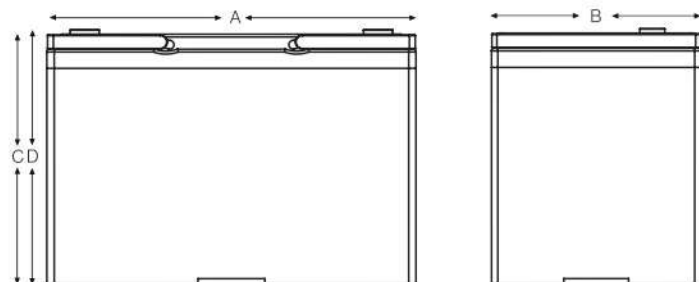

Electrical Specifications

Voltage	12V
80% DOD Voltage Cutoff	11.2V
Self Discharge	Less than 3% per month (20°C/68°F)
Charge Temperature	Min: -10°C (14°F) / Max: 50°C (122°F)
Discharge Temperature**	Min: -40°C (-40°F) / Max: 50°C (122°F)
Storage	Min: -20°C (-4°F) / Max: 60°C (140°F)

Amp Hours (AH)					
20 HR	10 HR	5 HR	3 HR	2 HR	1 HR
120	116	105	97	91	74

** CAUTION: Depths of discharge, operating voltages and currents, when designing systems for use at maximum temperatures, will vary.

Mechanical Specifications


Industry Reference	12	
Length (A)	13 in	329 mm
Width (B)	6.7 in	170 mm
Height (C)	10.2 in	258 mm
Height (D)	10.2 in	260 mm
Weight	97 lbs	44 kgs
Terminal (Opt'l)*	M8	
Cell(s)	6	
Electrolyte	Gel	
Terminal Torque Nm	8	

NOTE: There is a tolerance of +/-2%.

*Including A-Terminal



B Part of our Bloc Batteries range



Features

Maintenance-free bloc batteries in Gel technology (no topping up during lifetime)

Good high current performance for extreme operating conditions

High-class patented safety valve

700 cycles (DIN EN 60254-1) (IEC 254-1)

Valve-regulated lead-acid battery

Recyclable

Long cycle life

Classified as a non-spillable battery is not restricted for transportation by:

- Air (IATA/ICAO provision 67)
- Ground (STB, DOT-CFR-HMR49)
- Water (IMDG amendment 27)

Applications

Electric vehicles

Wheelchairs

Cleaning machines

Electric working platforms

Universal for multiple cyclic applications


Compliant with EN60254-1 & IEC254-1

Charging profile


IU Charging I = min. 12% C₅ max. 18% C₅
 U = 2.4 V per cell

IUI Charging I₁ = min. 12% C₅ max. 18% C₅
 U = 2.35 V per cell
 I₂ = 1.5 % C₅ for max. 4 hours


Self discharge at different temperatures

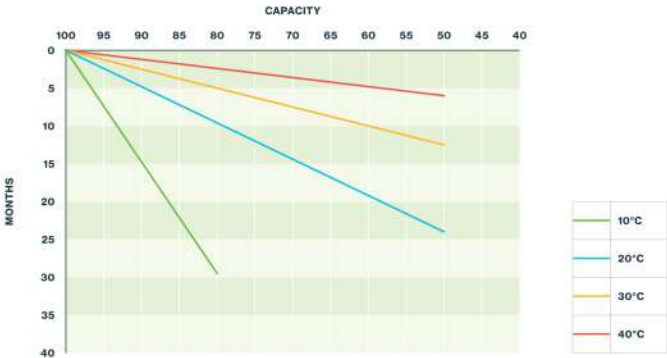

Capacity vs. temperature

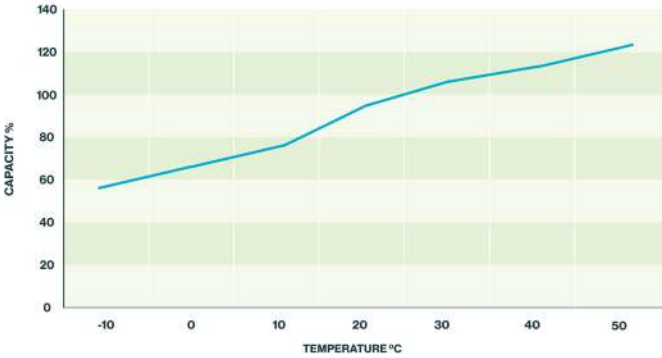

Relation between charging, voltage and temperature

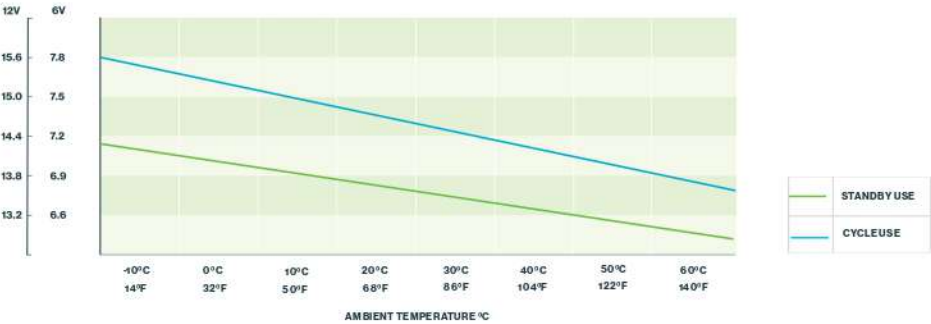

Storage: Determine the state of charge

